

SURROUND SOUND REFERENCE IN-WALL SUBWOOFERS

R10SUB • R12SUB

Overview

Created for AV Designers building systems that require the best surround sound available with a look that fits the space aesthetically, the Sonance Reference in-wall subwoofers provide a truly incredible sound without taking up floorspace. Engineered to give you an amazing cinema experience, Sonance Reference has options for in-wall, in-ceiling and cabinet speakers.

Key Features

Aesthetics

- Mix and match with Reference in-wall or in-ceiling speakers
- One-piece paintable grille to blend into your walls
- Available in 10" or 12" models to suit any sized room or available wall space

Performance


- 1.4lbs (.64kg) N38SH Neodymium Magnet
- Dual Spider Technology (DST) allows for increased movement
- 4 1/2" (115mm) precision-aligned voice coil with 1 1/2" (30mm) winding height

Installation

- Designed for installation during the construction or renovation process
- Enclosure is positioned behind the wall to deliver unprecedented performance with minimal visual intrusion
- Custom-tuned amplifiers ensure optimum sonic performance




R10SUB



R10SUB with
Grille



R12SUB

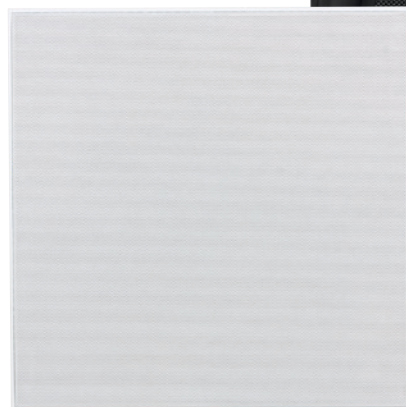

R12SUB with
Grille


Dimensions

R10SUB

Width:	10 7/16" (265mm)
Height:	10 7/16" (265mm)
Depth:	3 5/32" (80mm)
Width with grille:	13 1/16" (332mm)
Height with grille:	13 1/16" (332mm)
Depth with grille:	5/32" (4mm)

R12SUB

Width:	12 3/8" (314mm)
Height:	12 3/8" (314mm)
Depth:	3 5/32" (80mm)
Width with grille:	15" (381mm)
Height with grille:	15" (381mm)
Depth with grille:	5/32" (4mm)

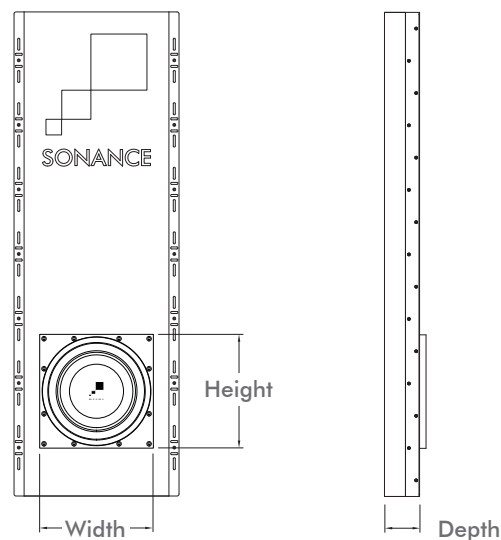

Specifications

Model:	R10SUB	R12SUB
SKU:	93354	93355
Unit of Measure:	Each	Each
Woofers:	10" (254mm) laminated carbon fiber cone with a rubber surround	12" (305mm) laminated carbon fiber cone with a rubber surround
Frequency Response:	30Hz - 250Hz +/-3dB	25Hz - 250Hz +/-3dB
Impedance:	8 Ohms nominal	8 Ohms nominal
Sensitivity:	88dB (2.83V/1) meter	90dB (2.83V/1) meter
Grille Material:	Perforated steel	Perforated steel
Required Enclosure:	R10SUB ENC acoustic enclosure (sold separately)	R12SUB ENC acoustic enclosure (sold separately)
Required Amplification:	Sonance DSP 2-150 or Sonance DSP 8-130 MKII (Using two channels bridged)	Sonance DSP 2-750 (Used in stereo setting)

Required Products



R10SUB ENC
SKU 92874



R12SUB ENC
SKU 92875



Sonamp DSP 2-150 Amplifier
SKU 93093



Sonamp DSP 8-130 MKII Amplifier
SKU 93331



Sonamp DSP 2-750 Amplifier
SKU 93095

LIMITED LIFETIME WARRANTY

Sonance warrants to the first end-user purchaser that this Sonance-brand product ("Product"), when purchased from an authorized Sonance Dealer/Distributor, will be free from defective workmanship and materials for the life of the Product, except for the grille, which is warranted for five (5) years. Sonance will, at its option and expense, either repair the defect or replace the Product with a new or remanufactured Product or a reasonable equivalent. **Please visit our website and owner's e-Manual for complete warranty and exclusion information.**



©2017 Sonance. All rights reserved. Sonance and Visual Performance are registered trademarks of Dana Innovations.

Due to continuous product improvement, all features and specifications are subject to change without notice. For the latest Sonance product specification information visit our website: www.sonance.com

SONANCE • 991 Calle Amanecer • San Clemente, CA 92673 USA (949) 492-7777 • FAX: (949) 361-5151 • Technical Support: (949) 492-7777
www.sonance.com

11.07.17